

Jacks & Couplers

2024



SunField LLC
Agricultural Parts



Precision. Capability. Value. Delivered.

Premium Ag Implement & Commercial Trailer Parts.

www.sunfieldllc.com



PIPEMOUNT SWIVEL JACKS

- Includes a pin and lanyard assembly as well as a 2" raw male mating pipe (8,000 lb. models include a heavy duty 3" female mating pipe)
- Grease zerk for easy greasing of jack
- 3,000 lb. and 5,000 lb. models come standard with a welded on 3-3/4" x 7-1/2" durable zinc finish sand foot
- 8,000 lb. models come standard with a welded on 6" x 8" durable zinc finish sand foot



Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Jack Height	Description	Unit Weight (lbs)
60010031	5,000	3,000	Topwind	10"	11"	17"	9/16" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	11.78
60010034	5,000	3,000	Topwind	15"	16"	22"	9/16" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	14.09
60010033	5,000	3,000	Sidewind	10"	10"	17.5"	5/8" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	13.8
60010036	5,000	3,000	Sidewind	15"	15.25"	22.75"	5/8" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	16.27
60010038	8,000	7,000	Topwind	10"	10"	19.75"	5/8" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	13.13
60010039	8,000	7,000	Sidewind	10"	10"	21.5"	5/8" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	15.31
60010040	8,000	7,000	Topwind	15"	10"	30.25"	5/8" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	15.76
60010041	8,000	7,000	Sidewind	15"	10"	31"	5/8" pull lanyard, bracket mount, black powder coat outer tube clear zinc inner tube	17.93
60020010	Male mating pipe (inside pipe), 2.0" O.D., weld on (2K Round & 5K top wind)							
60020011	Male mating pipe (inside pipe), 2" OD, 5/8" pin hole (5K side wind)							
60020012	Female mating pipe (outer) for 8,000 lb. jacks, 3" OD—round & square							

SQUARE TUBE SWIVEL & WELD ON JACKS



60010059
Extended



60010054



60010057



60010052

- 8,000 lb. models use a 2-1/2" outer tube and come with a large 6" x 8" weld on durable zinc finish sand foot
- 8,000 lb. sidewind models include a belly band welded to the bottom of the outer tube for added strength
- All models come standard with a grease zerk for easy greasing of jack
- Drop leg add 13.75" of additional adjustability
- Pipemount models have 5/8" pin hole



60020013



60020012

SWIVEL JACKS

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Jack Height (fully retracted)	Description	Unit Weight (lbs)
60010057	8,000	7,000	Topwind	15"	14.5"	25.5"	Drop Leg	25.31
60010059	8,000	7,000	Sidewind	15"	14.5"	25.5"	Drop Leg	27.11
60020012	Female mating pipe (outer) for 8,000 lb. jacks, 3" OD—round & square							

DIRECT WELD JACKS


Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Bracket Height	Jack Height (fully retracted)	Description	Unit Weight (lbs)
60010052	8,000	7,000	Topwind	15"	N/A	25.25"	2-1/2" Outer Tube	20.66
60010054	8,000	7,000	Sidewind	15"	N/A	25.5"	2-1/2" Outer Tube	22.51
60020013	2.75" weldment bracket, fitting 5/8 pin, U shape channel fitting 2.5" jack tube. For 7/8K square Jacks							
60020012	Female mating pipe (outer) for 8,000 lb. jacks, 3" OD—round & square							



WELD ON SINGLE SPEED SQUARE TUBE JACKS

Engineered for agricultural, & commercial trailers where heavy duty lifting is needed

- Standard with durable black powder coat finish on outer and inner tubes. available SPECIAL ORDER with raw finish and high temperature grease for a trailer builder utilizing powder coat application
- Large octagon brass bushing for even better function
- Standard with spring return.
- Non spring return available SPECIAL ORDER
- Includes handle, handle mounting hardware and weld on clip
- Grease zerks for easy greasing of jack
- Drop leg adds 13.75" of additional adjustability

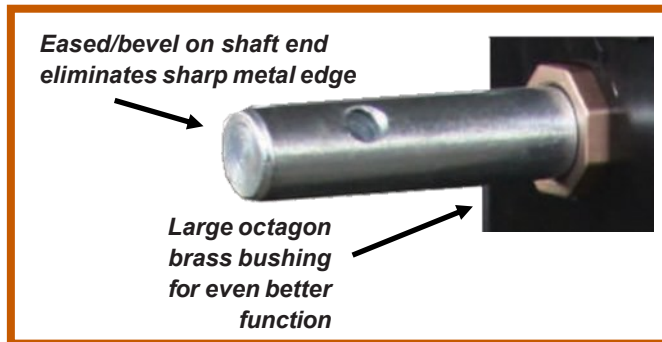

60010064



60010076

Product Code	Support Capacity (lbs)	Lift Capacity (lbs)	Handle Style	Travel Distance	Jack Height	Total Adjust.	Description	Unit Weight
60010064	12,000	10,000	Sidewind	12.5"	26"	25.5"	Pin to front, handle and mounting hardware	58.24
60010076	12,000	10,000	Topwind	12.5"	28"	25.5"	Pin to side, handle and mounting hardware	54

A-FRAME & ADJUSTABLE TRAILER COUPLERS



Sleeve Lock Cast Couplers



- *The a-frame sleeve lock coupler is stronger and has more steel content than others in the marketplace.*
- *2-5/16" A-frame & Adjustable sleeve lock couplers are rated at 12,500 lbs*
- *Solid shank and reenforced sleeve collar*
- *Standard with a durable black powder coat finish.*
- *Include all SAE required markings and are compliant to standard J684*

Adjustable Stamped & Cast Couplers



- *Adjustable couplers come standard with grade 8 nuts and bolts and are setup for an industry standard 3" wide channel*
- *Standard with a durable black powder coat finish*
- *2-5/16" stamped coupler is rated for 14,000 lbs*
- *2-5/16" cast coupler is rated at 15,000 lbs and has a durable top lever latch & pin assembly*
- *Includes grade 8 nuts abd bolts and are set up for industry standard 3" wide channel*
- *Include all SAE required markings and are compliant to standard J684*



- *6 hole / 5 position channel bracket has raw light oil finish*
- *Made from 1/2" plate steel*
- *21K Forged Steel Coupler*



GOOSENECK COUPLERS

- Hidden spring latch mechanism within casting for ease of use and protection of moving parts
- All gooseneck couplers with load bearing pin meet the SAE J2638 standard
- 30K gooseneck couplers and 25K and 30K square tube gooseneck couplers include a welded belly band on the bottom of the outer tube for added strength
- Includes set screws and load bearing pin



Precision cast head design features **EXCLUSIVE ONE PIECE COUPLER CASTING** with a curved internal ball clamp bar for greater strength and even better fit!



70030001



70030004

Round Gooseneck Couplers

Product Code	Ball Size	Capacity (lbs)	Outer Tube Size	Inner Tube Wall Thickness	Retracted Height	Adj.	Description	Unit Weight (lbs)
70030001	2-5/16"	25,000	4.5"	0.24"	29.2"	8"	Solid one piece cast head with curved internal ball clamp bar	54
70030002	2-5/16"	30,000	4.5"	0.30"	29.2"	8"	Solid one piece cast head with curved internal ball clamp bar	60

Square Gooseneck Couplers

Product Code	Ball Size	Capacity (lbs)	Outer Tube Size	Inner Tube Wall Thickness	Retracted Height	Adj.	Description	Unit Weight (lbs)
70030003	2-5/16"	25,000	4.5"	0.24"	32"	8"	Solid one piece cast head with curved internal ball clamp bar	64
70030004	2-5/16"	30,000	4.5"	0.275"	32"	8"	Solid one piece cast head with curved internal ball clamp bar	70

FORGED D-RINGS & SAFETY CHAINS



50020012



50020013



50040106



50020015



50020016



50040105

D-RINGS

Product Code	Diameter	Interior Dimensions	Safe Working Load (lbs)	Ultimate Breaking Strength (lbs)	Description	Unit Wt.
50040106	1/2"	2-1/2"x2-3/8"	4,080	11,780	Forged from C1045 steel with weld on mounting bracket	0.82
50040105	5/8"	3"x3"	6,130	18,390	Forged from C1045 steel with weld on mounting bracket	1.87

SAFETY CHAIN

Product Code	Cell Dia.	Overall Length	Capacity (lbs)	Grade	Hook Description	Unit Wt. (lbs)
50020012	5/16"	35"	11,700	43	1 Forged slip hook with safety latch (*2)	3.6
50020013	3/8"	35"	16,200	43	1 Forged slip hook with safety latch (*2)	5.8
50020015	1/4"	36"	12,600	70	1 Forged slip hook with safety latch (*2)	2.5
50020016	3/8"	40"	26,400	70	1 Forged slip hook with safety latch (*2)	5.2



991 Haltom Rd
Fort Worth, TX, 76117

785 338 0314
sales@sunfieldllc.com



SunField LLC
Agricultural Parts

Precision. Capability. Value. Delivered.